




Klassic - LTKL 110

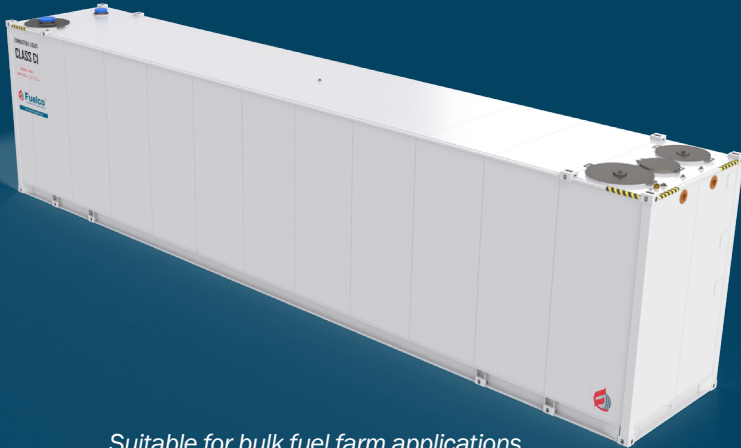

Suitable for bulk fuel farm applications

Self banded double wall design with

- Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Warranty - 5 years structural, 1 year on valves (conditions apply)

Pump bay model standard with:

- Bunded pump bay with lockable weatherproof doors
- Galvanised access ladder and platform; with ladder fitted to either side of the platform (ex-factory)
- Galvanised kick plate and middle rail provided for additional safety of users

Specifications

Description

| | |
|----------------------|----------------------------------|
| Safe Fill, litres | 109,000 |
| Length, mm | 14,630 |
| Width, mm | 2,438 |
| Height, mm | 3,635 |
| Weight (empty) kg | 20,500 |
| Vent Pipe | Standard |
| Fluid Level Dipstick | Standard |
| Compliance | AS1940, AS1692, AS1657, UL142 |



Bulk lubricant farm
with optional tank
stands

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras

GLOBAL CONTACTS

MIDDLE EAST : +971 50 719 7137 | ASIA : +61 430 531 448 | AFRICA : +61 437 022 349

SOUTH AMERICA: +56 9 9219 1598 | CENTRAL AMERICA: +50 5 2277 3216