




Klassic - LTKL 68

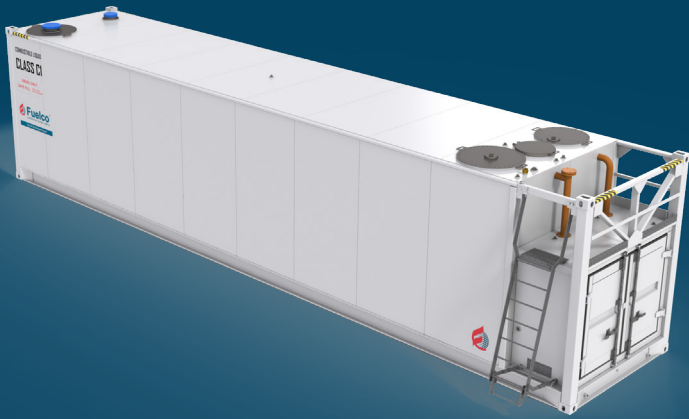

Self bunded double wall design with

- Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Warranty - 5 years structural, 1 year on valves (conditions apply)


Pump bay model standard with:

- Bunded pump bay with lockable weatherproof doors
- Galvanised access ladder and platform; with ladder fitted to either side of the platform (ex-factory)
- Galvanised kick plate and middle rail provided for additional safety of users

Specifications

Description

Safe Fill, litres	64,600
Length, mm	12,192
Width, mm	2,438
Height, mm	2,896
Weight (empty) kg	14,600
Vent Pipe	Standard
Fluid Level Dipstick	Standard
Compliance	AS1940, AS1692, AS1657, UL142

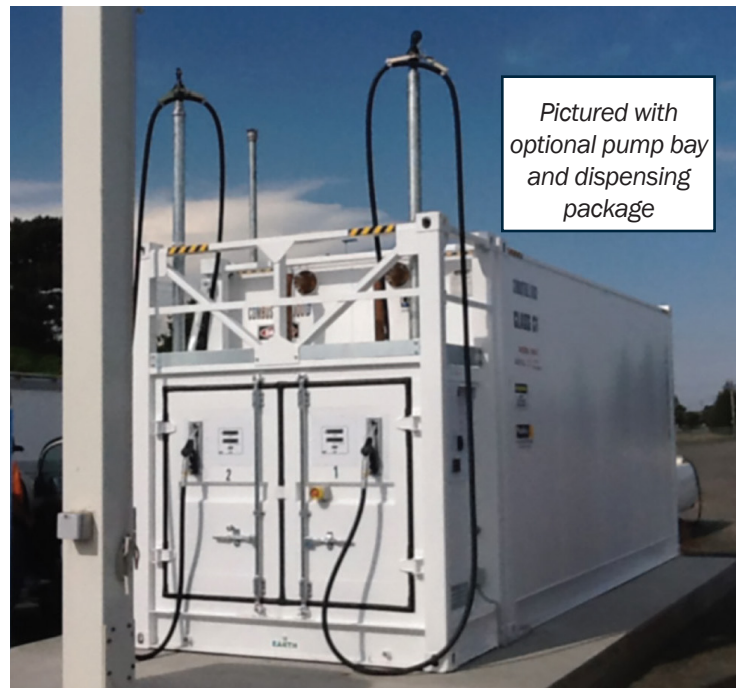

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras

GLOBAL CONTACTS

MIDDLE EAST : +971 50 719 7137 | ASIA : +61 430 531 448 | AFRICA : +61 437 022 349

SOUTH AMERICA: +56 9 9219 1598 | CENTRAL AMERICA: +50 5 2277 3216