




# Klassic - LTKL 110

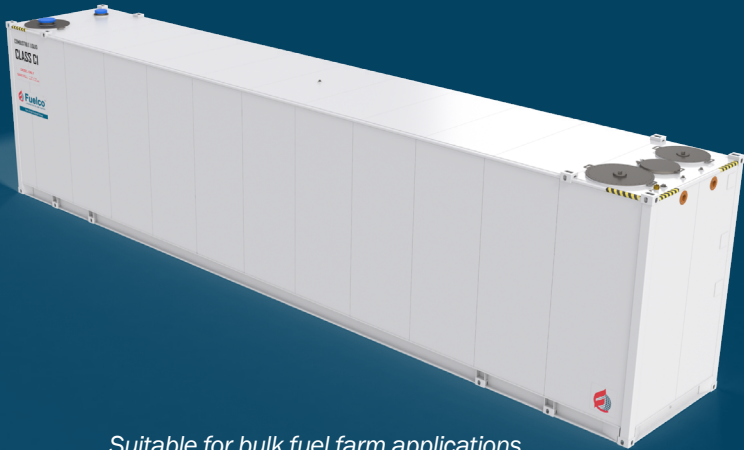

Suitable for bulk fuel farm applications

### Self bunded double wall design with

- Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Warranty - 5 years structural, 1 year on valves (conditions apply)

### Pump bay model standard with:

- Bunded pump bay with lockable weatherproof doors
- Galvanised access ladder and platform; with ladder fitted to either side of the platform (ex-factory)
- Galvanised kick plate and middle rail provided for additional safety of users

## Specifications

Description	
Safe Fill, litres	109,000
Length, mm	14,630
Width, mm	2438
Height, mm	3635
Weight (empty) kg	20,500
Vent Pipe	Standard
Fluid Level Dipstick	Standard
Compliance	AS1940, AS1692, AS1657, UL142, ULCS601



Bulk lubricant farm with optional tank stands

*Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras*

### CONTACT US:

+61 (03) 9775 1366 | sales@fuelco.com.au  
FUELCO.COM.AU

*Fuelco holds stock of these tanks in ALL states across Australia. For details on availability and pricing, please contact your local state manager.*