



# Fuelco™

complete fuel storage solutions



## SPEC SHEET

**Kube Self Bunded Tank  
7,000L**

# Kube 7000L Self Bunded Tank

## Standard Tanks Features:




- **LOCKABLE CONTAINMENT** - For securely housing pumps and hose connections
- **LIFTING POINTS** - Simplifying crane handling
- **SECURE MANWAY** - Providing access to tank for cleaning and inspections
- **GALVANISED EDGE**- Prevents nicks and damages
- **BAFFLED INTERNALLY** - Restricts movement of product
- **DECALS** - Providing clear critical information to operators or users
- **DIKED DESIGN** - Allowing the inner tank to be removed from the outer tank
- **CORNER POSTS** - Providing full edge protection
- **FORK POCKETS** -Double sided to provide access from all sides



Specification	Details
Tank Model	LTKD7
Gross Fill	7200 litres, (1902 USG / 1584 IG)
Safe Fill	6840 litres, (1807 USG / 1505 IG)
Length	2230 mm, (87.79 in)
Width	2312 mm, (91.02 in)
Height	1274 mm, (50.15 in)
Tare Weight	2280 kg
Compliance	AS 1692, UL142

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras.

## Contact details:

-  +61 (03) 9775 1366
-  sales@fuelco.com.au
-  fuelco.com.au

## Request a Quote Today





Fuelco holds stock of these tanks in ALL states across Australia. For details on availability and pricing, please contact your local state manager.



8 7 6 5 4 3 2 1

- NOTES:
1. BAFFLED INTERNALLY.
  2. CONTAINMENT AREA FOR PUMP, HOSE AND/OR NOZZLE STORAGE.
  3. DESIGNED TO BE STACKED FOR STORAGE.
  4. VENT PIPE FOR TANKS USED IN AUSTRALIA/NZ.
  5. REAR SOCKETS WITH HOLES FOR AUSTRALIA/NZ.

TANK DATA	
DESIGNED TO	AS1692, UL 142
BUILT TO	UL142
GROSS VOLUME	7 200 L (1 902 USG / 1 584 IG)
SAFE FILL LEVEL	6 840 L (1 807 USG / 1 505 IG)
PNEUMATIC TEST	21-35 kPa (INNER & OUTER)
TOTAL MASS	2 280 kg (EMPTY)
PAINT	Base Coat: Intergard 345 AkzoNobel (Int.), thickness: 80-100µm
	Top Coat: Interthane 990 AkzoNobel (Int.), thickness: 70-80µm

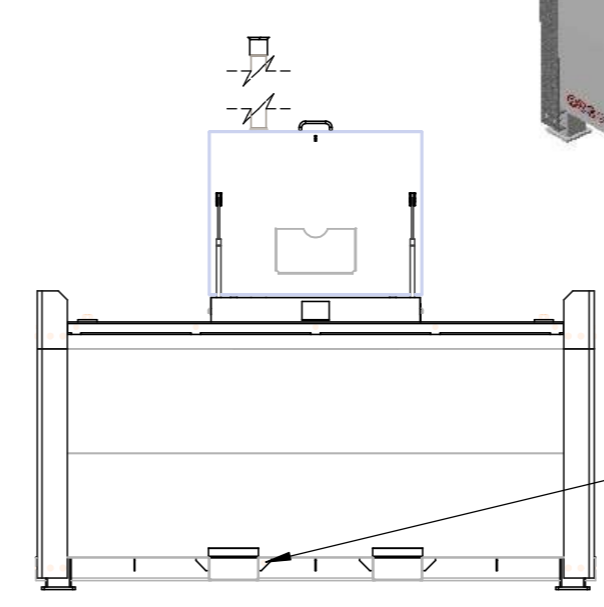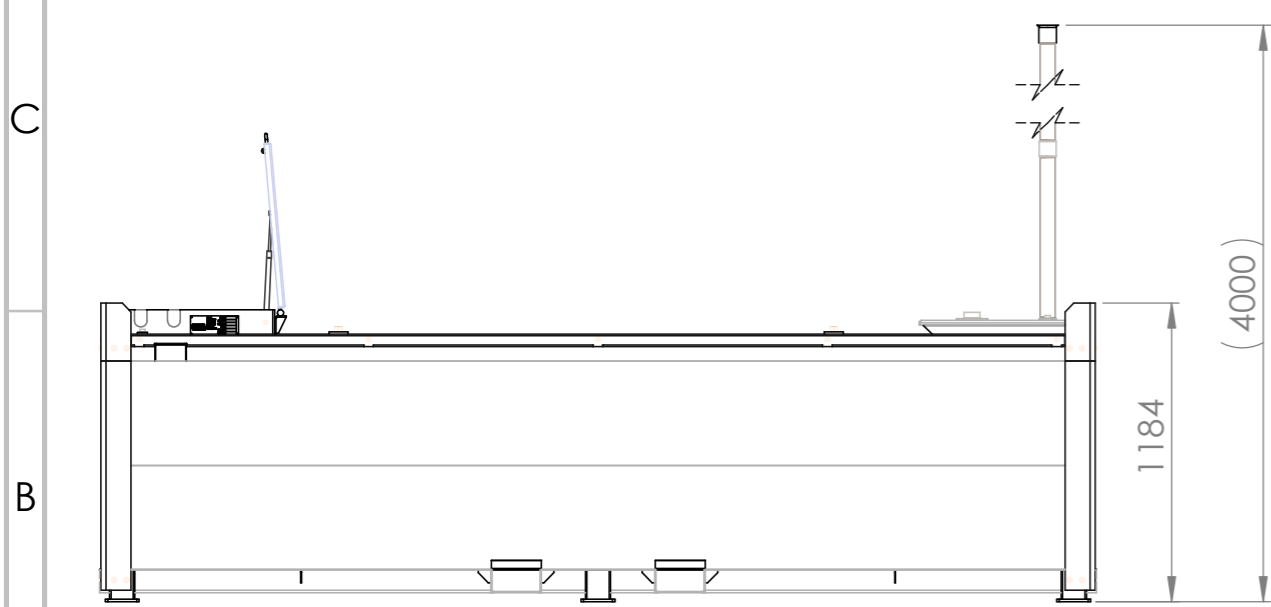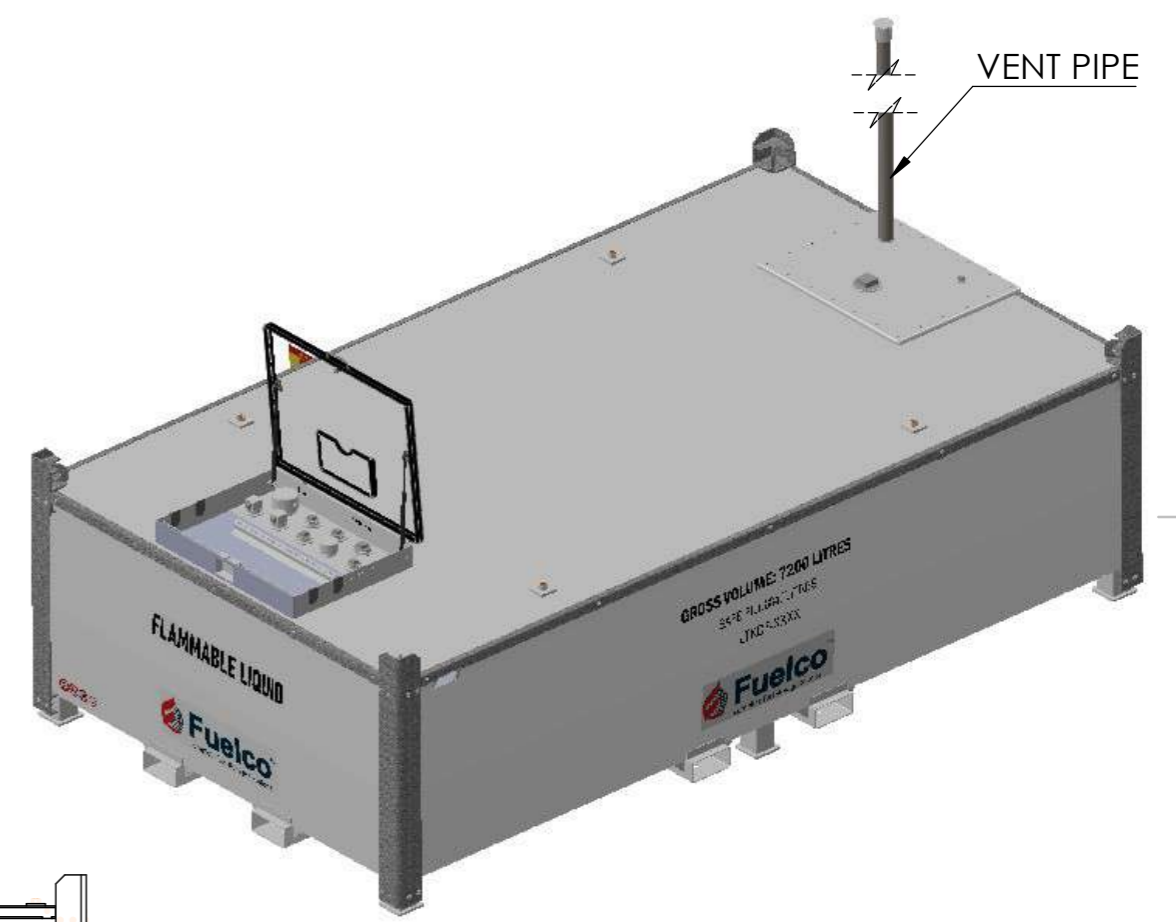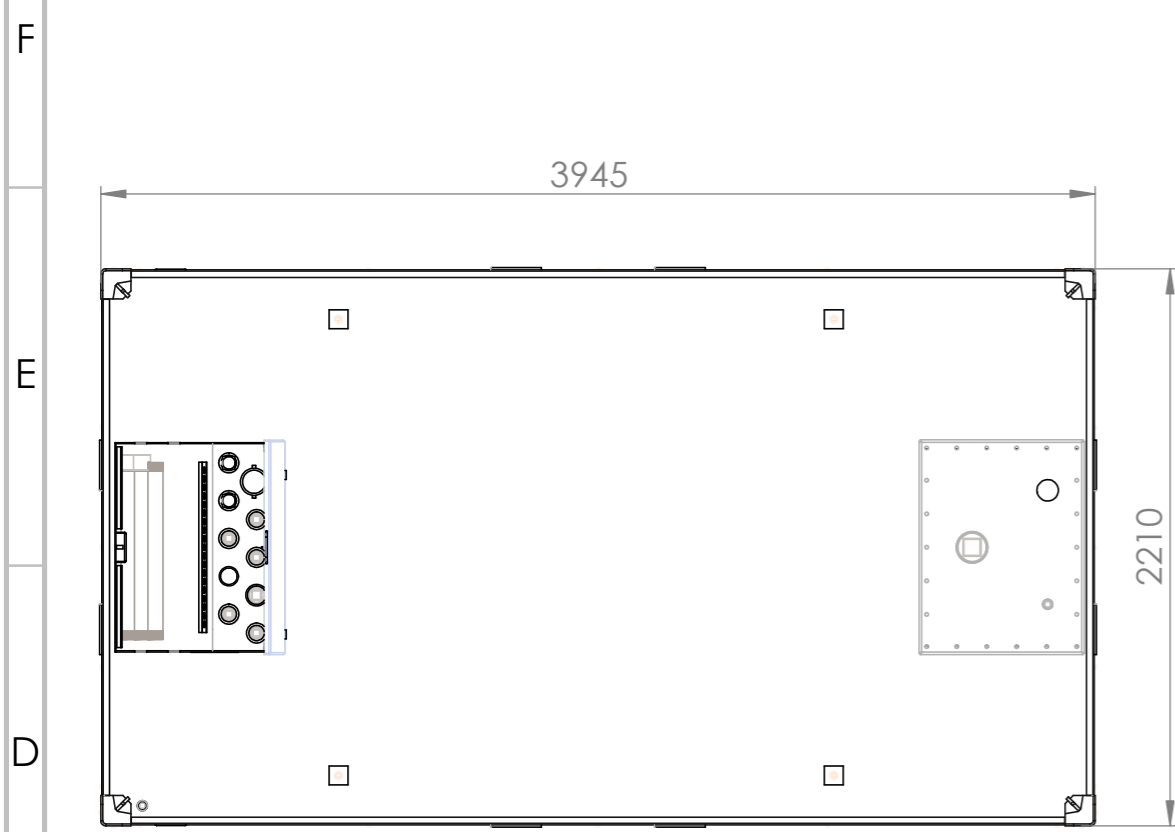

EARTHING POINT


REV.	DESCRIPTION	DATE	DWN	APP
8	RE-ISSUED FOR INFORMATION	24/10/2024	LIB	HS
7	UPDATE FORKLIFT & GUSSET THICKNESS TO 5mm	22/12/2023	RVD	HS
6	CENTER LEG ADDED	12/09/2023	LIB	HS
5	UPDATE NOZZLE TABLE	24/02/2023	LIB	HS
4	CHANGED OVERALL HEIGHT TO 1184mm	11/11/2022	LIB	HS
3	RE-ISSUED FOR INFORMATION	07/11/2022	LIB	HS
2	RE-ISSUED FOR INFORMATION	20/09/2022	LIB	HS
1	ISSUED FOR INFORMATION	11/06/2022	LIB	HS

**IF IN DOUBT ASK. DRAWING INFORMATION TAKES PRECEDENCE OVER PARTS LIST**

	<b>GENERAL NOTES</b> DO NOT SCALE UNLESS STATED OTHERWISE:- ALL DIMENSIONS IN MILLIMETERS ALL THREADS ARE METRIC COARSE DEBURR & REMOVE ALL SHARP EDGES TOLERANCES: TYPE TOLERANCE GENERAL ±5.0 ONE DECIMAL PLACE ±0.1 TWO DECIMAL PLACE ±0.1 ANGULAR (°) ±1.0	SCALE	NTS	TITLE	LTKD7 ASSEMBLY GENERAL ARRANGEMENT SHEET 1 OF 3 DRAWING NUMBER LTKD7-GA
		DWN	H SINGH	20/01/2022	
		MATERIAL			
		THICKNESS			
		FINISH		REV	8

8 7 6 5 4 3 2 1

E:\Eredyne Group Dropbox\Lionel

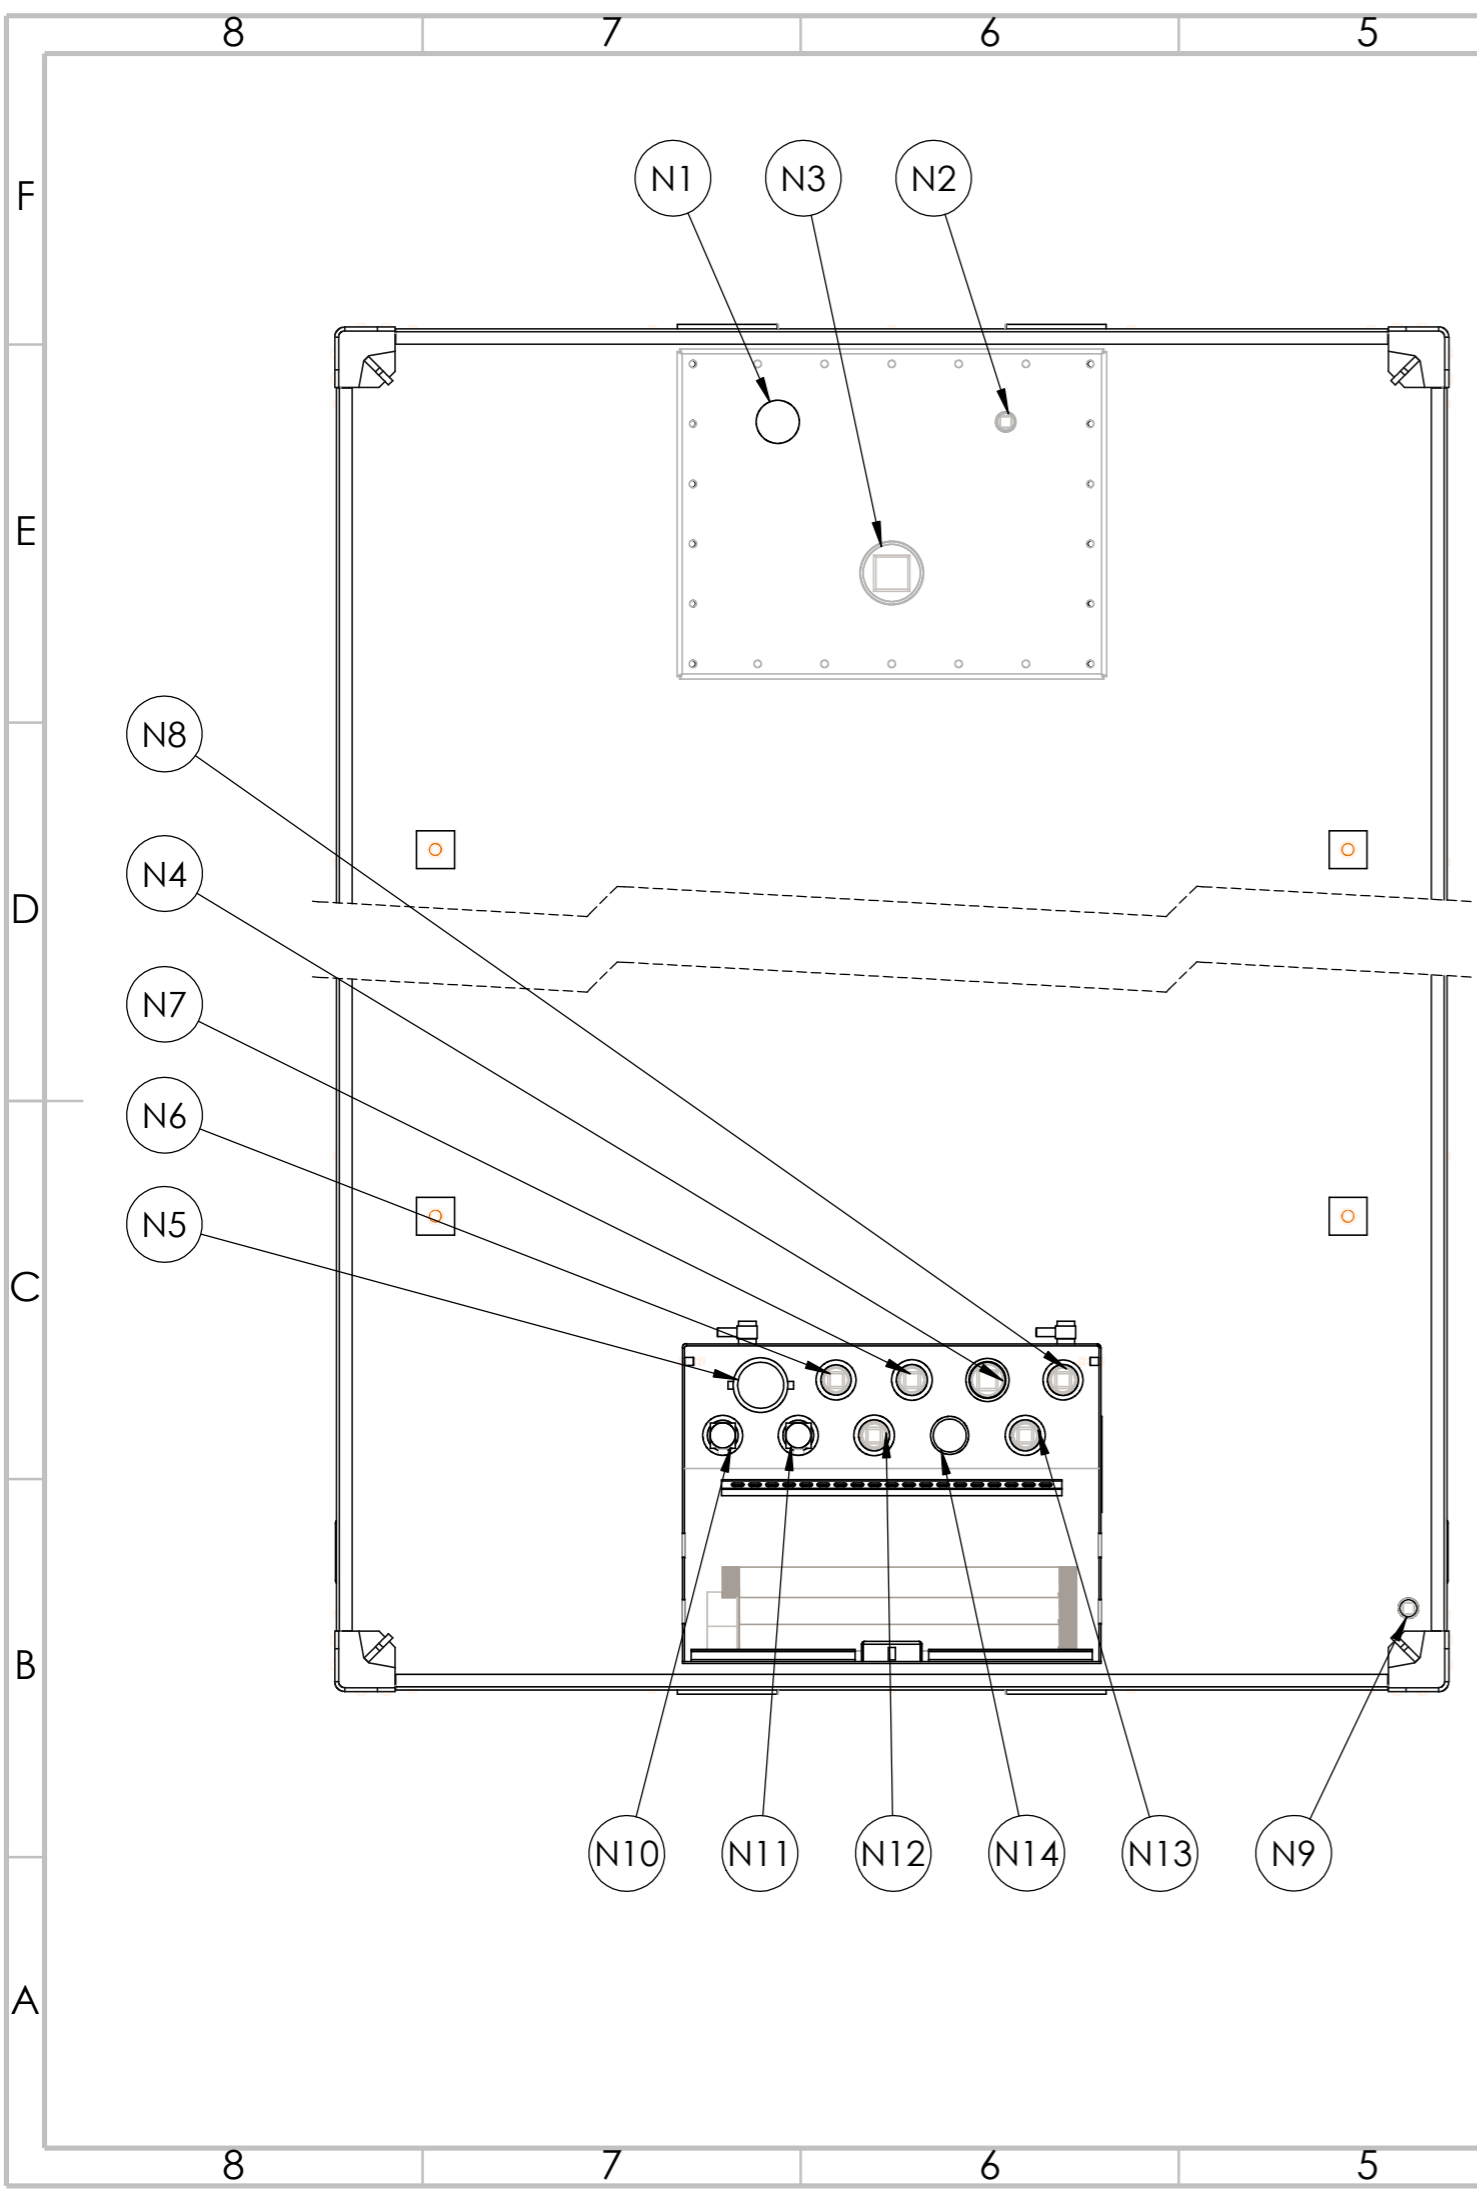

NOZZLE NO.	SIZE	CONNECTION TYPE	DESCRIPTION
N1	DN50	BSP-F x 50 LONG	SPARE / FREE-TO-AIR VENT (FOR AUSTRALIA/NZ ONLY)
N2	DN25	BSP-F x 45 LONG	SPARE (FOR AUSTRALIA/NZ ONLY)
N3	DN50	BSP-F x 87 LONG	SPARE (FOR AUSTRALIA/NZ ONLY)
N4	DN50	NPT-F x 50 LONG	PRESSURE/VACUUM VENT
N5	DN80	NPT-M x 75 LONG	FILL C/W DN80 PIPE 15mm FROM FLOOR
N6	DN40	BSP-F x 50 LONG	SPARE
N7	DN40	BSP-F x 50 LONG	SPARE
N8	DN40	BSP-F x 50 LONG	GAUGE
N9	DN25	BSP-F x 45 LONG	INTERSTITIAL SPACE DRAIN POINT
N10	DN40	BSP-F x 50 LONG	SUCTION C/W DN25 PIPE 25mm FROM FLOOR
N11	DN40	BSP-F x 50 LONG	SUCTION C/W DN15 PIPE AND FOOT VALVE, 10mm FROM FLOOR
N12	DN40	BSP-F x 50 LONG	RETURN
N13	DN40	BSP-F x 50 LONG	SPARE
N14	DN50	BSP-M x 50 LONG	DIP C/W DN50 PIPE CONNECTED TO FLOOR

NOTES:

- FRONT HATCH LID HIDDEN FOR CLARITY.

**IF IN DOUBT ASK. DRAWING INFORMATION TAKES PRECEDENCE OVER PARTS LIST**

**Fuelco**<sup>TM</sup>  
complete fuel storage solutions  
Part of the Eredyne Group


**GENERAL NOTES**  
DO NOT SCALE  
UNLESS STATED OTHERWISE:-  
ALL DIMENSIONS IN MILLIMETERS  
ALL THREADS ARE METRIC COARSE  
DEBURR & REMOVE ALL SHARP EDGES  
TOLERANCES:

TYPE	TOLERANCE
GENERAL	±5.0
ONE DECIMAL PLACE	±0.1
TWO DECIMAL PLACE	±0.1
ANGULAR (°)	±1.0


SCALE	NTS
DWN	H SINGH 20/01/2022
MATERIAL	
THICKNESS	
FINISH	

TITLE	LTKD7 ASSEMBLY NOZZLE SCHEDULE
DRAWING NUMBER	LTKD7-GA
SHEET 2 OF 3	
REV	8

COPYRIGHT. This drawing and the information herein is the property of Fuelco PTY LTD and must not be reproduced, transmitted or disclosed to other parties without written permission from the owners

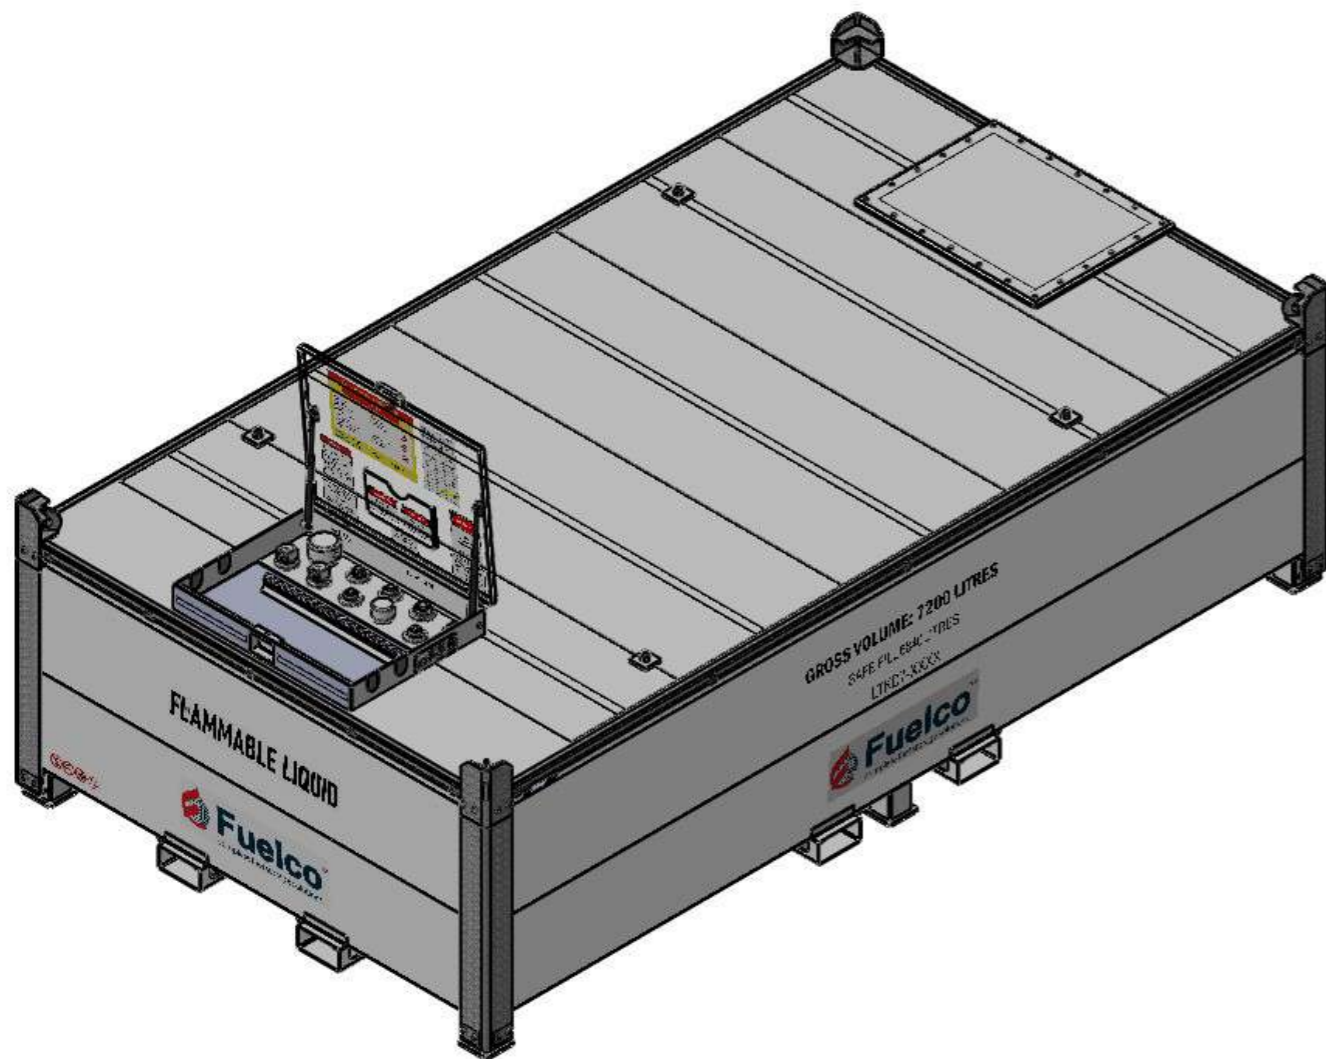

TANK WITH STANDARD HATCH COVER

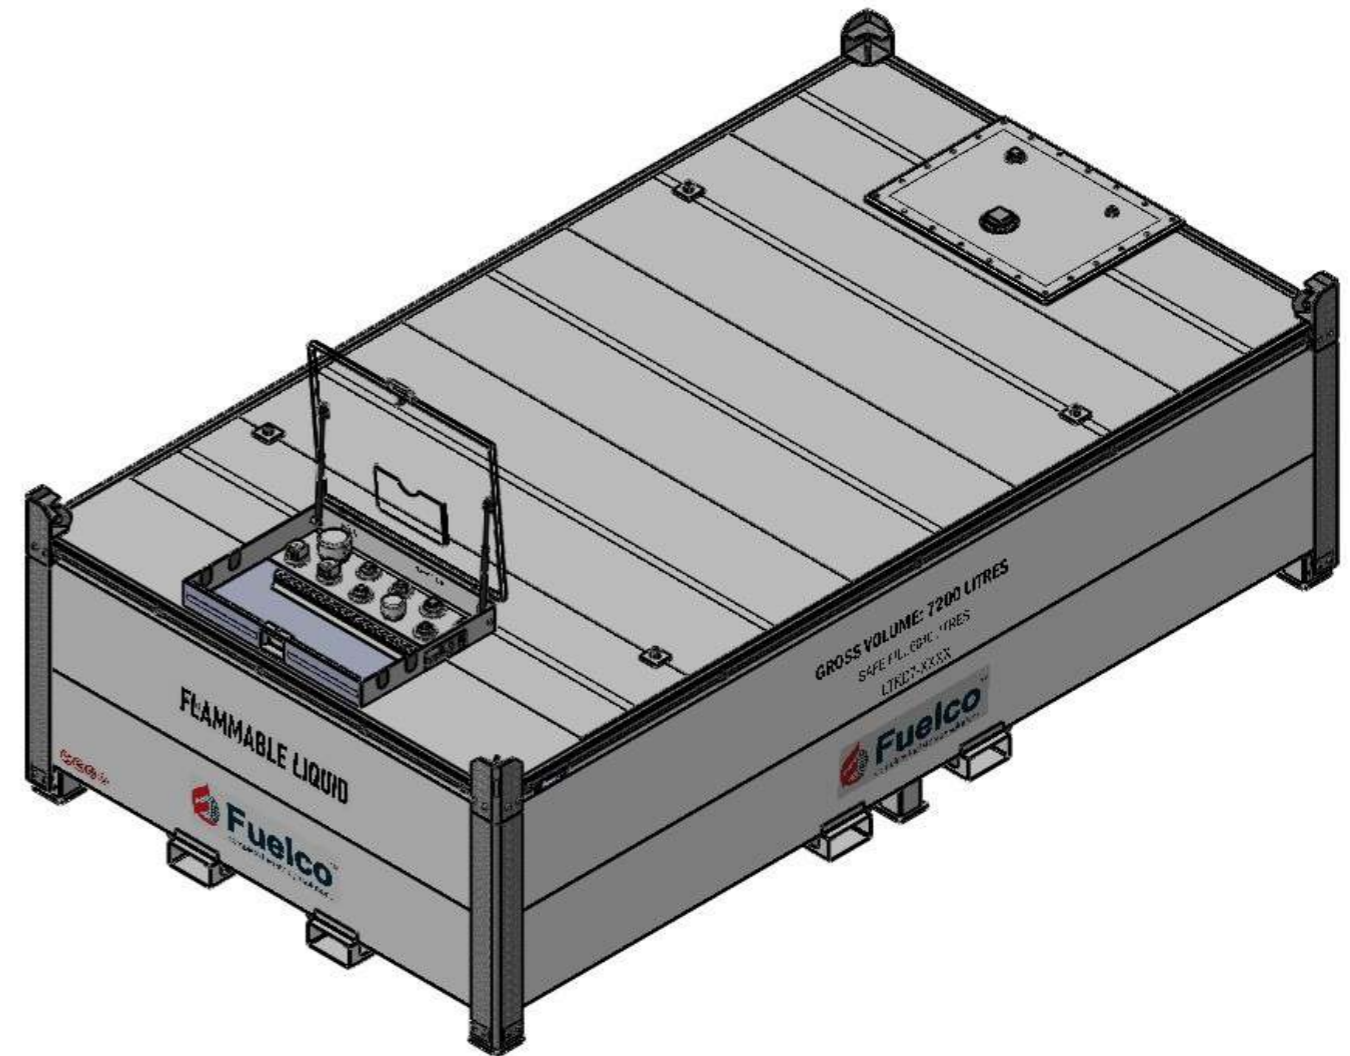

TANK WITH HATCH COVER FOR AUSTRALIA/NZ ONLY

**IF IN DOUBT ASK.  
DRAWING INFORMATION TAKES PRECEDENCE OVER PARTS LIST**

**Fuelco**<sup>TM</sup>  
complete fuel storage solutions

Part of the Eredyne Group

COPYRIGHT. This drawing and the information herein is the property of Fuelco PTY LTD and must not be reproduced, transmitted or disclosed to other parties without written permission from the owners

GENERAL NOTES	
DO NOT SCALE	
UNLESS STATED OTHERWISE:-	
ALL DIMENSIONS IN MILLIMETERS	
ALL THREADS ARE METRIC COARSE	
DEBURR & REMOVE ALL SHARP EDGES	
TOLERANCES:	
TYPE	TOLERANCE
GENERAL	±5.0
ONE DECIMAL PLACE	±0.1
TWO DECIMAL PLACE	±0.1
ANGULAR (°)	±1.0

SCALE	NTS
DWN	H SINGH 20/01/2022
MATERIAL	
THICKNESS	
FINISH	

TITLE	LTKD7 ASSEMBLY NOZZLE SCHEDULE
DRAWING NUMBER	LTKD7-GA
SHEET 3 OF 3	
REV	8



A3