




FuelcoTM
complete fuel storage solutions

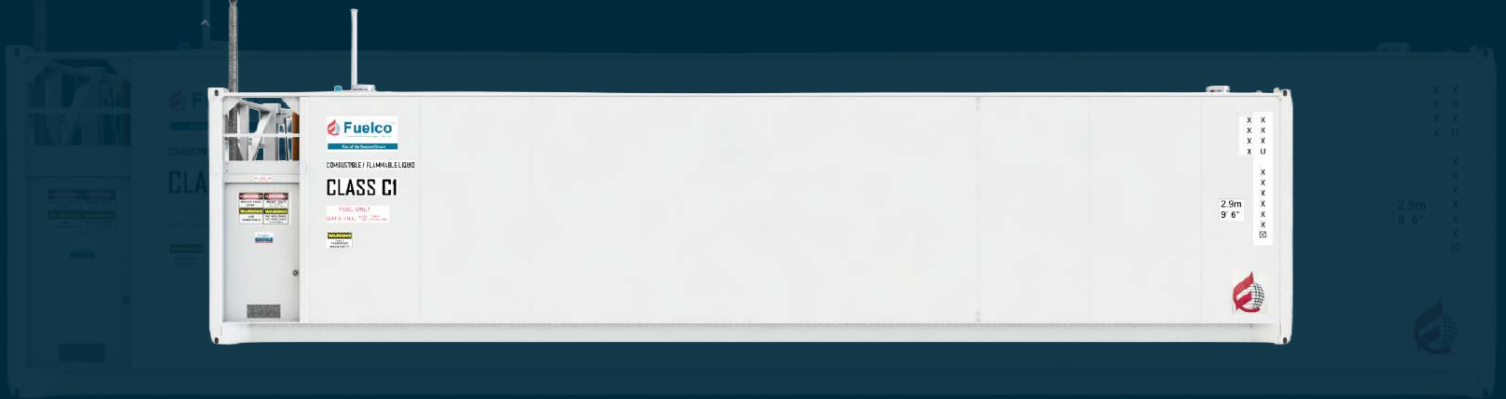

SPEC SHEET

Klassic Tanks – LTKL 100

Klassic – LTKL 100


Standard Tanks Features:

Self bunded double wall design with

- Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway**
- Warranty - 5 years structural**, 1 year on valves (conditions apply)

Options include:

- Inspection ladder
- Clip-on pump bay
- Dispensing and fuel management

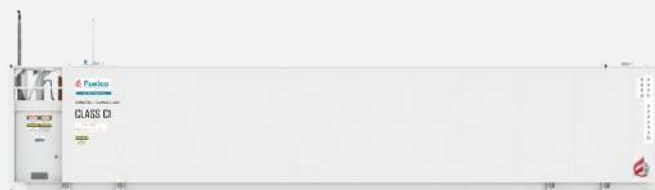

Specification	Details
Tank Model	LTKL 100
Gross Fill	99,500 litres
SFL	97,500 litres
Length	14,630 mm
Width	2438 mm
Height	3200 mm
Empty Weight	17,556 kg
Vent Pipe	Standard
Fluid Level Dipstick	Standard
Compliance	AS1940, AS1692, AS1657, UL142, ULCS601

Disclaimer: Information and photographs shown are for marketing purposes only.
 Actual product may vary to images shown due to continual improvement processes, design changes and optional extras.


Contact details:

+61 (03) 9775 1366
 sales@fuelco.com.au
 fuelco.com.au

Request a Quote Today

Fuelco holds stock of these tanks in ALL states across Australia. For details on availability and pricing, please contact your local state manager.



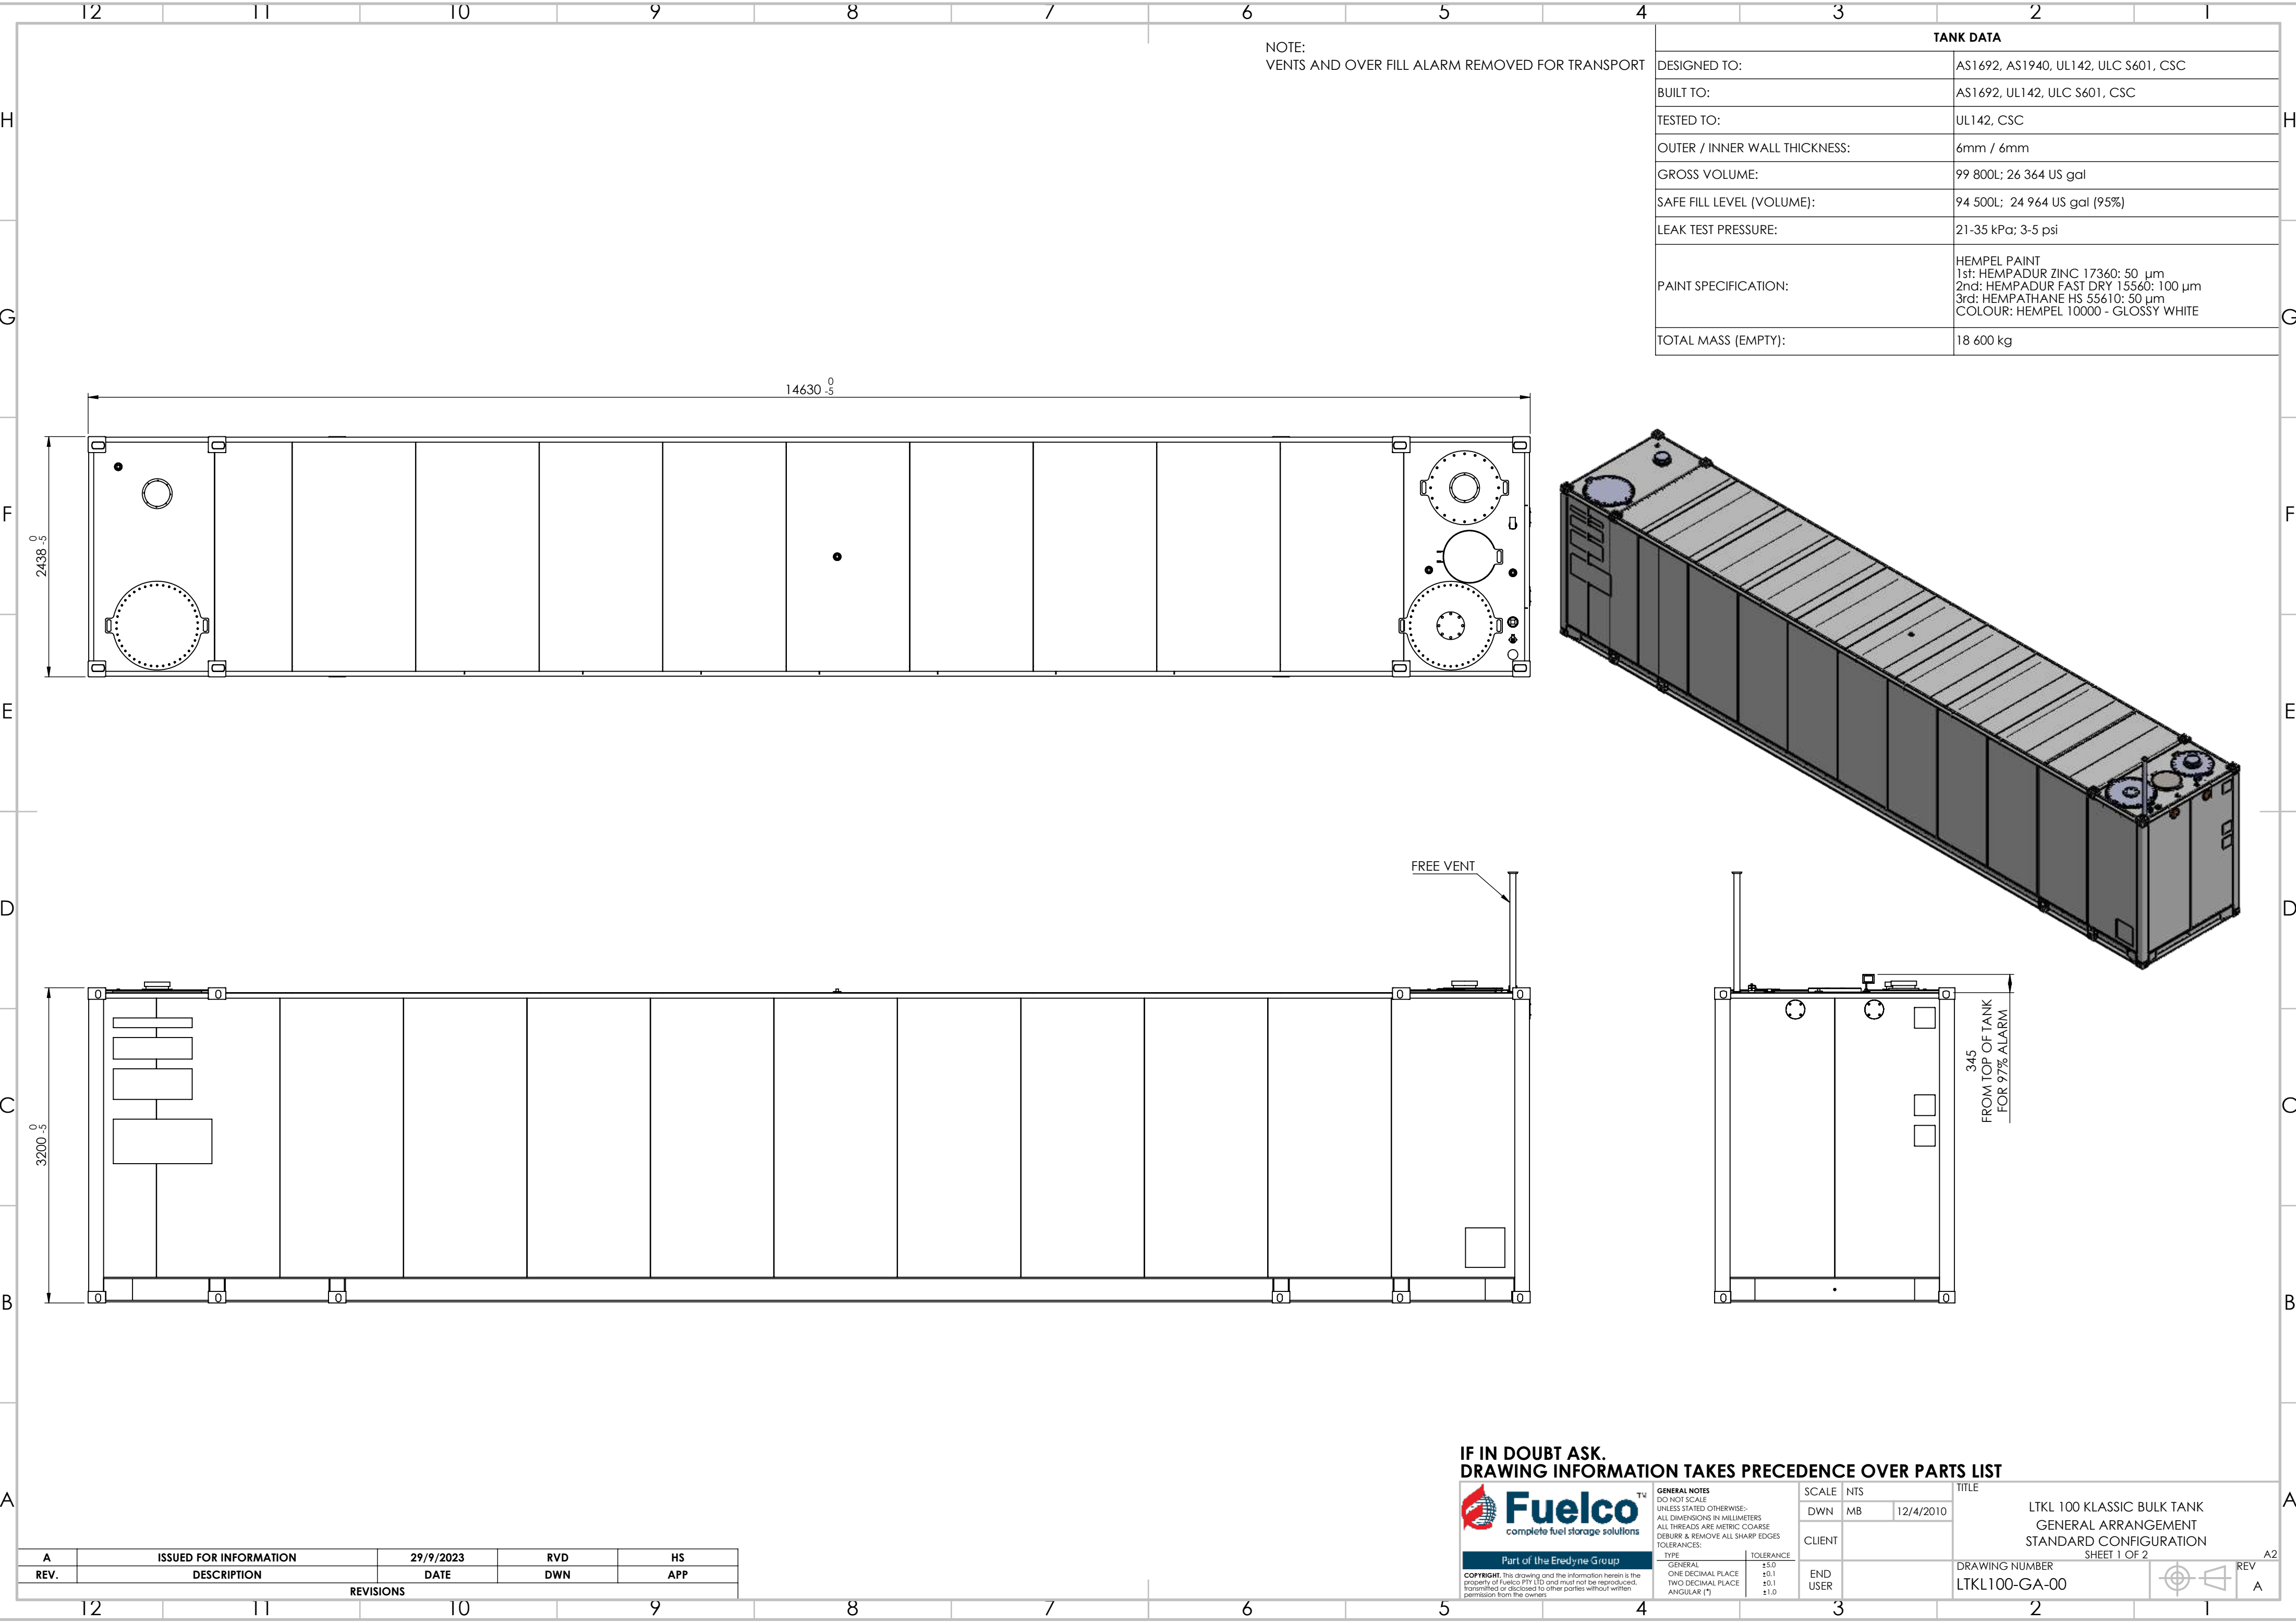

A	ISSUED FOR INFORMATION	29/9/2023	RVD	HS
REV.	DESCRIPTION	DATE	DWN	APP

REVISIONS

IF IN DOUBT ASK.
DRAWING INFORMATION TAKES PRECEDENCE OVER PARTS LIST



Part of the Eredyne Group

COPYRIGHT: This drawing and the information herein is the property of Fuelco Pty Ltd and must not be reproduced, transmitted or disclosed to other parties without written permission from the owners.

GENERAL NOTES
DO NOT SCALE
UNLESS STATED OTHERWISE:-
ALL DIMENSIONS IN MILLIMETERS
ALL THREADS ARE METRIC COARSE
DEBURR & REMOVE ALL SHARP EDGES
TOLERANCES:




TYPE	TOLERANCE
GENERAL	±5.0
ONE DECIMAL PLACE	±0.1
TWO DECIMAL PLACE	±0.1
ANGULAR (*)	±1.0

SCALE	NTS	TITLE
DWN	MB	12/4/2010
CLIENT		
END USER		

DRAWING NUMBER
LTKL100-GA-00

REV
A

LTKL 100 KLASIK BULK TANK
GENERAL ARRANGEMENT
STANDARD CONFIGURATION
SHEET 1 OF 2

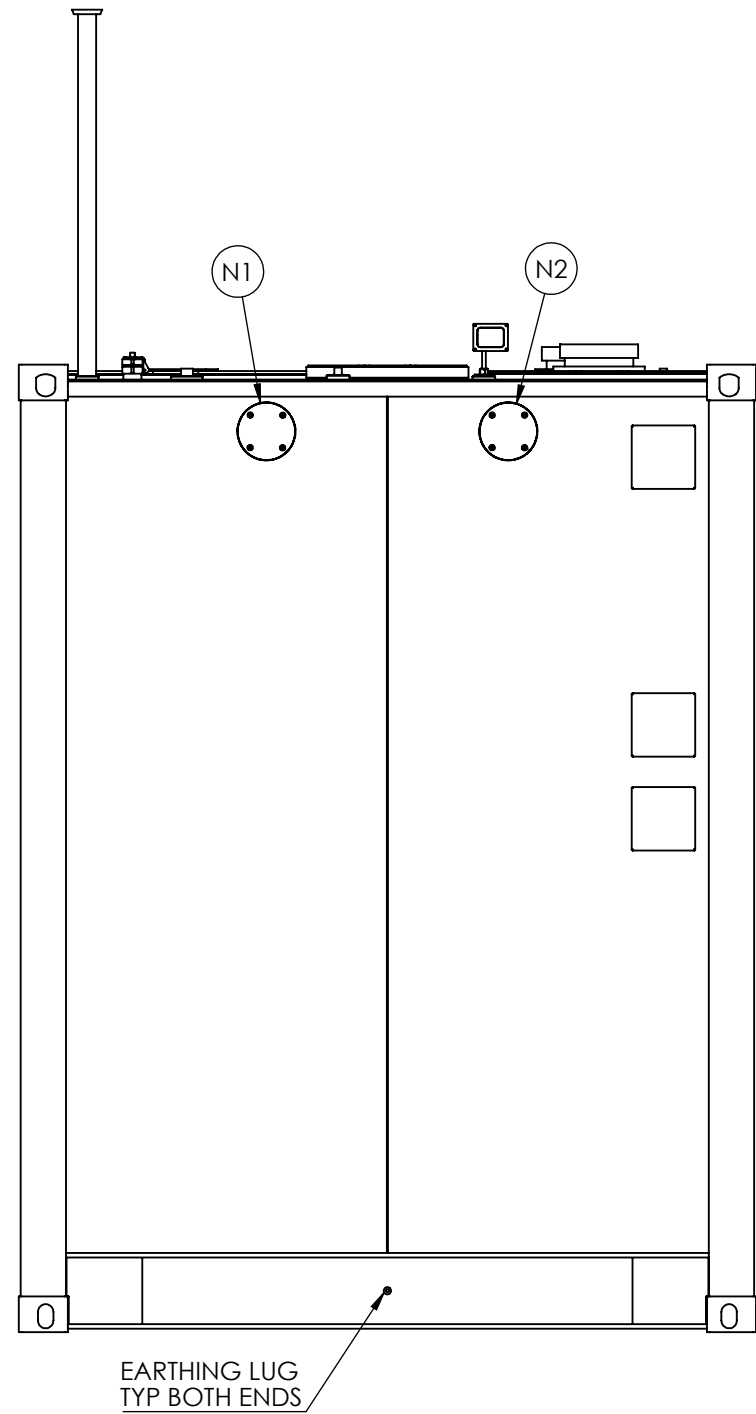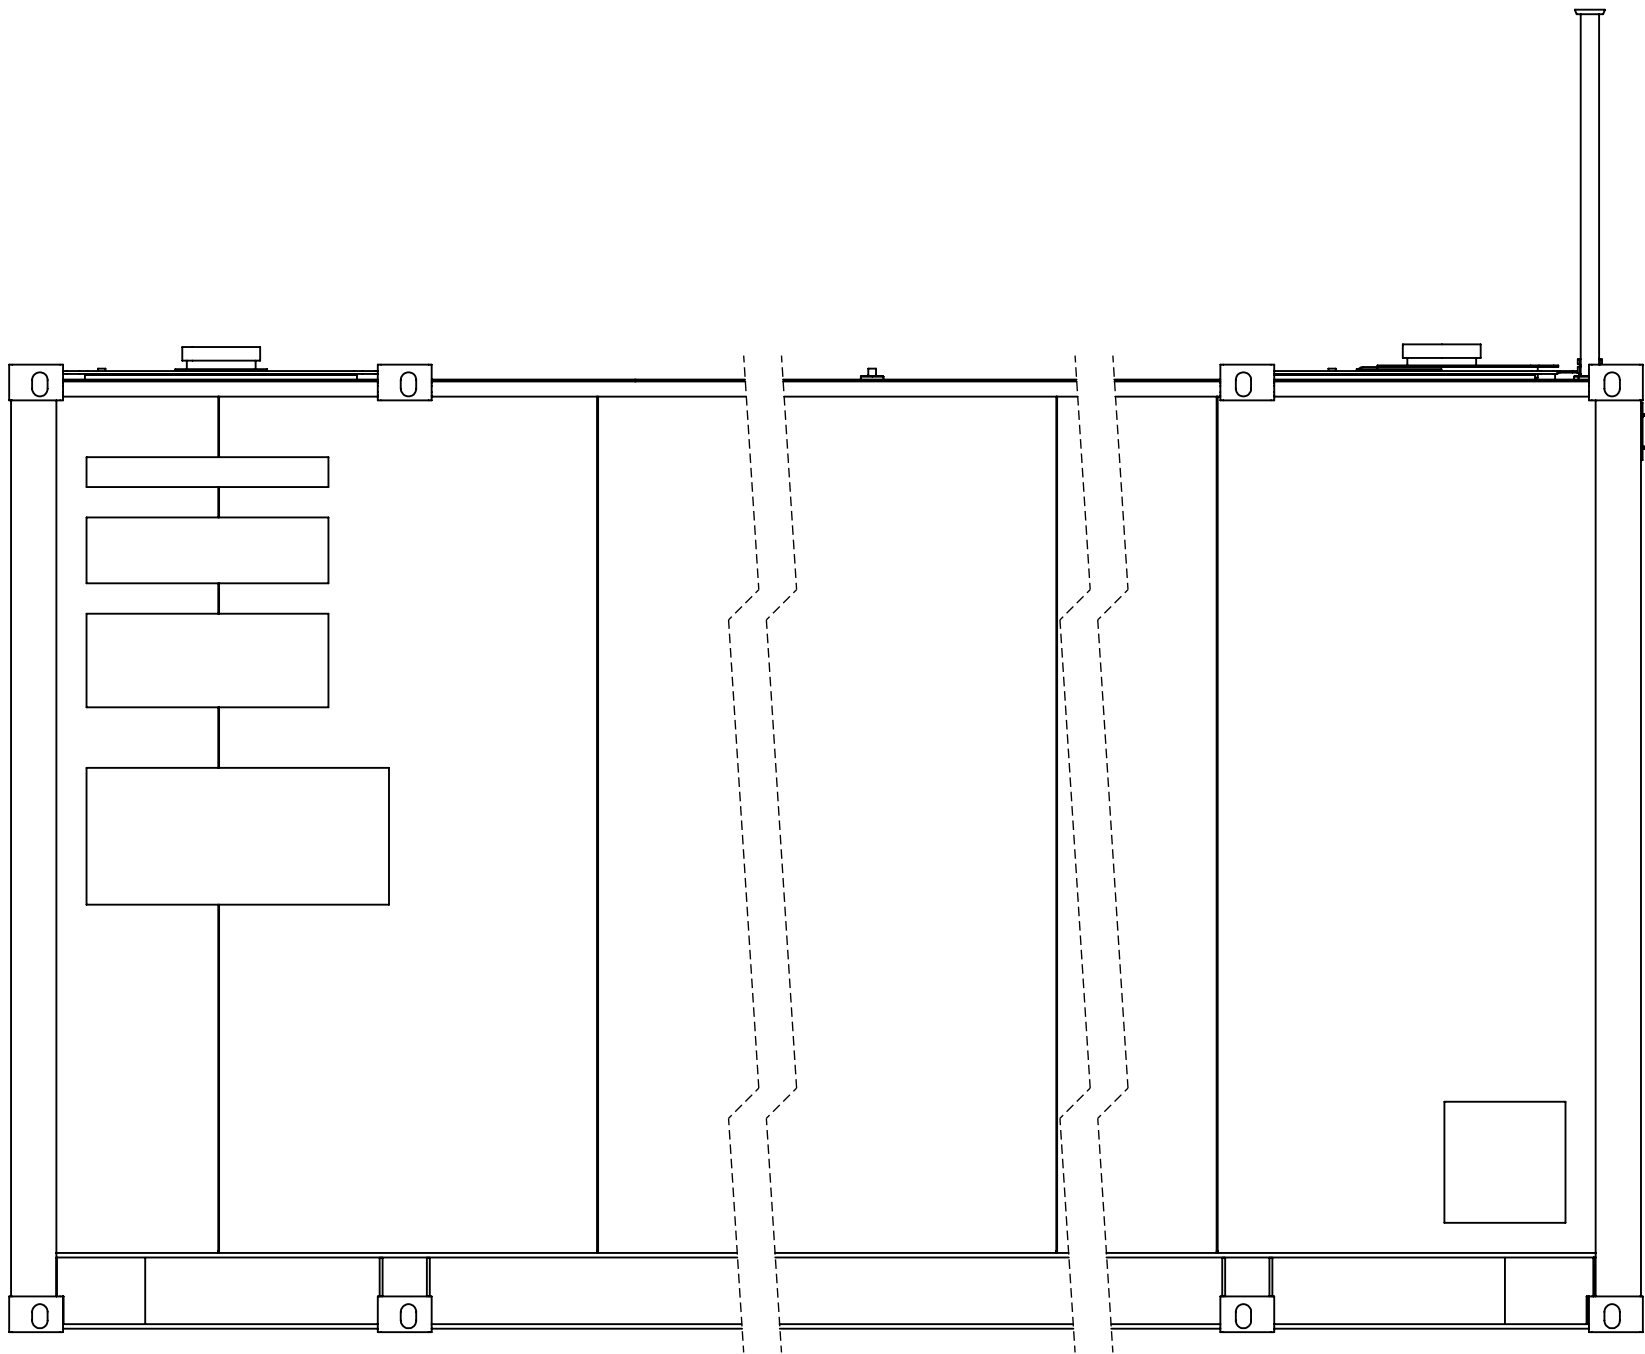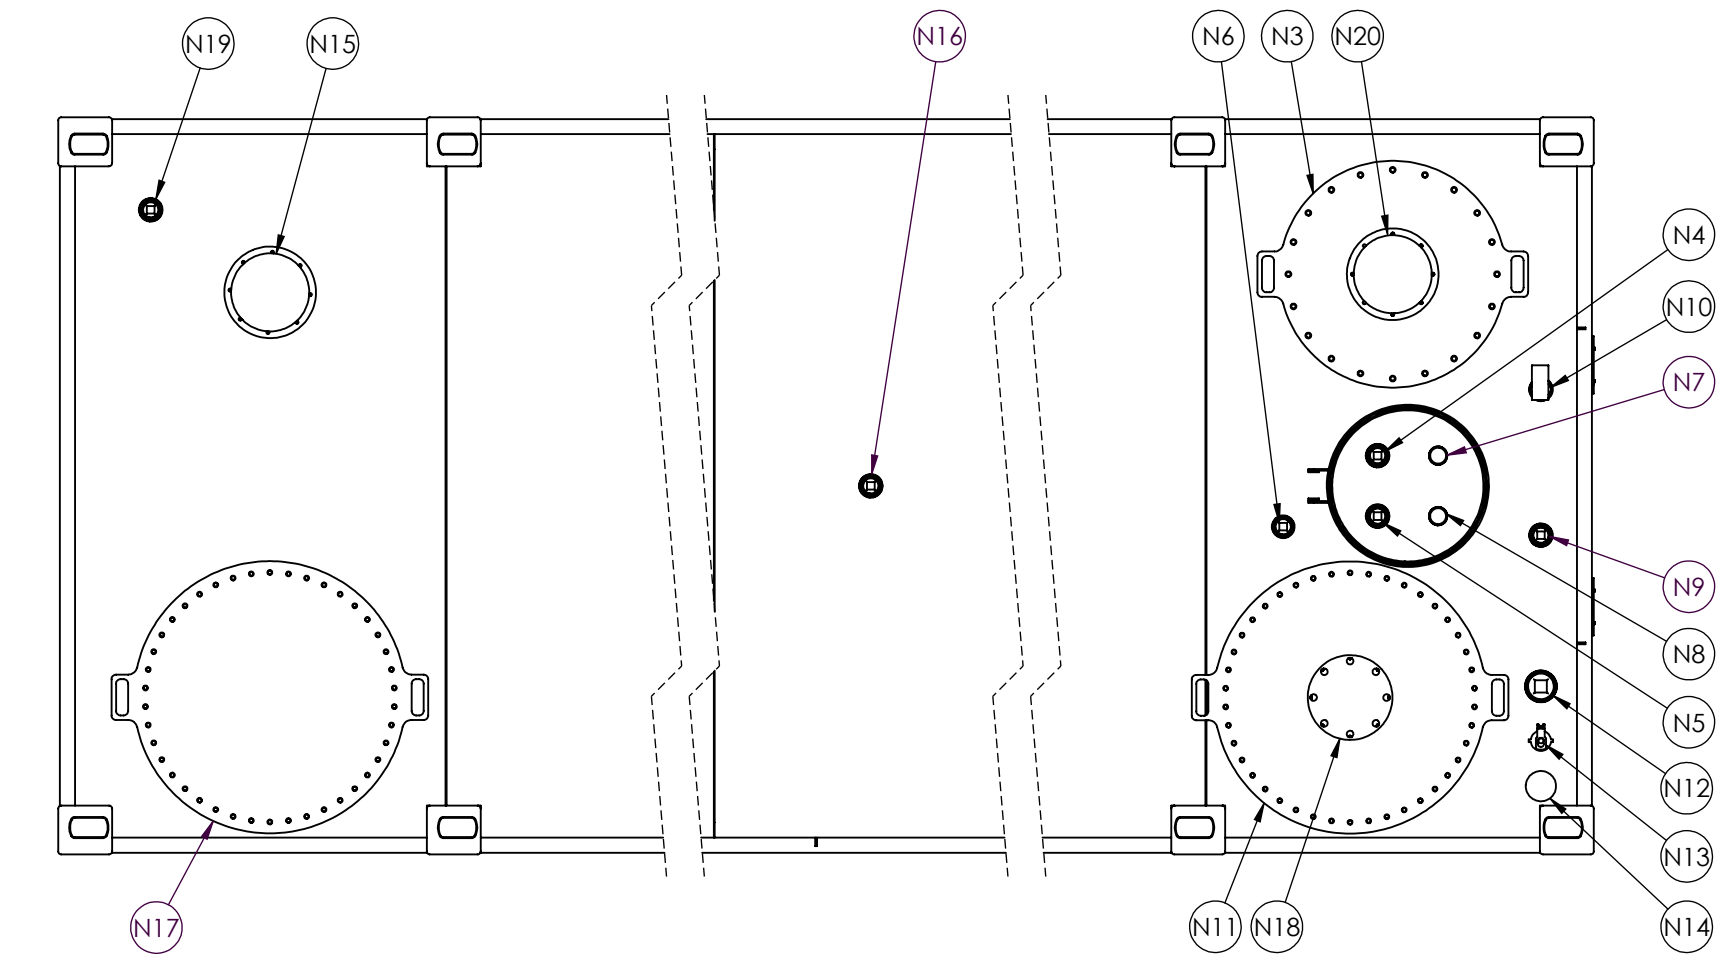

3		2		1
NOZZLE NO.	SIZE	CONNECTION TYPE	DESCRIPTION	
N1	DN80	ASME CLASS 150 FLANGE	SUCTION C/W DN80 PIPE TO FLOOR & FOOT VALVE	
N2	DN80	ASME CLASS 150 FLANGE	FILL PIPE C/W DN80 PIPE TO FLOOR, OVERFILL PROTECTION VALVE,	
N3	600	INSPECTION HATCH	INSPECTION HATCH WITH ACCESS TO OVER FILL PROTECTION VALVE	
N4	DN50	BSP-F x 50 LONG	SPARE	
N5	DN50	BSP-F x 50 LONG	SPARE	
N6	DN50	BSP-F x 50 LONG	SPARE / GAUGE	
N7	DN50	BSP-M x 35 LONG	PRIMARY TANK DIP C/W DN50 PIPE TO FLOOR & LOCKABLE DIP CAP	
N8	DN50	BSP-M x 35 LONG	INTERSTITIAL SPACE DIP C/W DN50 PIPE THROUGH INTERNAL FLOOR & LOCKABLE DIP CAP	
N9	DN50	BSP-F x 50 LONG	INTERSTITIAL SPACE EMERGENCY VENT / SPARE	
N10	DN50	BSP-F x 50 LONG	C/W OVERFILL WARNING ALARM	
N11	600	MANWAY	MANWAY AND ACCESS TO FOOT VALVE C/W LADDER ACCESS TO TANK INTERNAL	
N12	DN80	BSP-F x 75 LONG	SPARE / GAUGE	
N13	DN50	BSP-M x 35 LONG	SUCTION SPEAR, DN50 PIPE TO FLOOR C/W THREADED CAP	
N14	DN50	BSP-F x 35 LONG	FREE VENT C/W RISER & VENT CAP SUPPLIED LOOSE	
N15	DN200	ASME CLASS 150 FLANGE	INTERSTITIAL SPACE EMERGENCY VENT C/W DN200 PIPE CONNECTED THROUGH INTERNAL SKIN.	
N16	DN50	BSP-F x 50 LONG	SPARE / GAUGE	
N17	600	MANWAY	MANWAY	
N18	DN200	ASME CLASS 150 FLANGE	SPARE / SUBMERSIBLE PUMP	
N19	DN50	BSP-F x 50 LONG	SPARE / GAUGE	
N20	DN200	ASME CLASS 150 FLANGE	PRIMARY EMERGENCY VENT	

BSP-F: BSP FEMALE THREAD
BSP-M: BSP MALE THREAD

IF IN DOUBT ASK.
DRAWING INFORMATION TAKES PRECEDENCE OVER PARTS LIST

 complete fuel storage solutions Part of the Eredyne Group		GENERAL NOTES DO NOT SCALE UNLESS STATED OTHERWISE:- ALL DIMENSIONS IN MILLIMETERS ALL THREADS ARE METRIC COARSE DEBURR & REMOVE ALL SHARP EDGES TOLERANCES: TYPE GENERAL ONE DECIMAL PLACE TWO DECIMAL PLACE ANGULAR (*)		SCALE NTS DWN MB 12/4/2010		TITLE LTKL 100 KLASSTIC BULK TANK GENERAL ARRANGEMENT STANDARD CONFIGURATION SHEET 2 OF 2	
				CLIENT END USER		DRAWING NUMBER LTKL100-GA-00	
COPYRIGHT: This drawing and the information herein is the property of Fuelco PTY LTD and must not be reproduced, transmitted or disclosed to other parties without written permission from the owners.		TOLERANCE ±5.0 ±0.1 ±0.1 ±1.0		REV A		A2	